



## CRATETIEP



**01**

SIZES



**10 - 16**

WATTS



**01**

BEAM ANGLES




**IP 20**

INGRESS

# CRATETIEP

wall mounted luminaires  
rectangular | adjustable | up-down

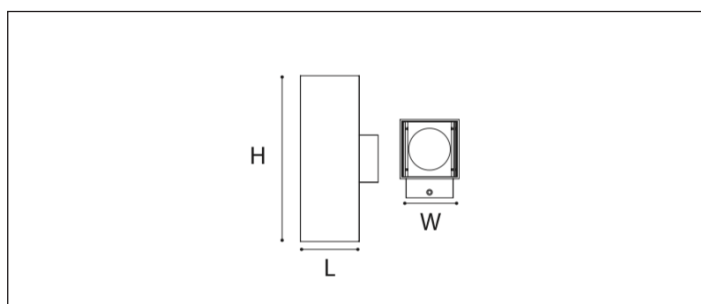

## Dimensions (mm)

	W	L	H
Size 1	75	99	210

Cratetiep wall mounted 'square' Up & Down light collection offers options to choose from wattages between 10W & 16W in all standard symmetric beam options and as made available in single discrete size within the standard color spectrums.

The complete range is IP65 suitable for outdoor applications as offered.

CCT of 5000K and 6000K are also available on request.

Standard protocol for fixed output driver is offered in our article coding. Dimmable driver options are available on request.

## Technical Data






**CREE** **bridgelux** **EPISTAR**

Body	Die Cast Aluminium
LED Type	COB
Colour Deviation	<2 SDCM
Colour Rendering Index	+90
Lumen Maintenance	L90 / B10 50000 hours
Driver	Integral
Dimmability	DALI (on request)
IP Rating	IP 65
Protection Class	Class II

## Certifications



## Available Options

Light Distribution	Watt	Lumen	Colour Temp	Finishes
60 deg Flood (F)	10	560	 2700 K	 White
	16	1120	 3000 K	 Black
			 4000 K	


## AEWIS

We reserve the right for technical and design changes  
For latest product update please refer [www.aewis.com](http://www.aewis.com)

# CRATETIEP

wall mounted luminaires

rectangular | adjustable | up-down

Size 1	Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
 <p>Length - 99 mm Width - 75 mm Height - 210 mm</p>	CT 211 010 2 A	White	10	560 lm	2700 K	15 - 60 deg
	CT 211 010 3 A	White	10	560 lm	3000 K	15 - 60 deg
	CT 211 010 4 A	White	10	560 lm	4000 K	15 - 60 deg
	CT 221 010 2 A	Black	10	560 lm	2700 K	15 - 60 deg
	CT 221 010 3 A	Black	10	560 lm	3000 K	15 - 60 deg
	CT 221 010 4 A	Black	10	560 lm	4000 K	15 - 60 deg
	CT 211 016 2 A	White	16	1120 lm	2700 K	15 - 60 deg
	CT 211 016 3 A	White	16	1120 lm	3000 K	15 - 60 deg
	CT 211 016 4 A	White	16	1120 lm	4000 K	15 - 60 deg
	CT 221 016 2 A	Black	16	1120 lm	2700 K	15 - 60 deg
	CT 221 016 3 A	Black	16	1120 lm	3000 K	15 - 60 deg
	CT 221 016 4 A	Black	16	1120 lm	4000 K	15 - 60 deg

## Light Distribution Curves

