

## DISCRETO



SIZES



WATTS




BEAM ANGLES



INGRESS

# DISCRETO

recessed luminaires  
round | fixed

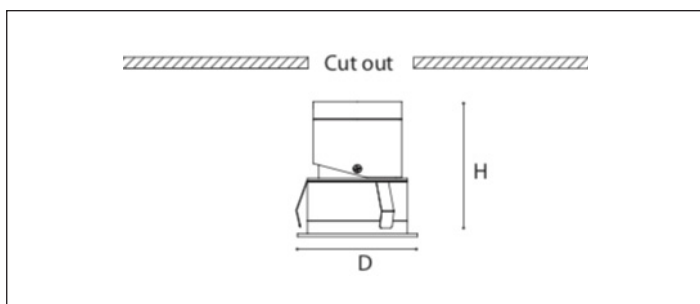

## Dimensions (mm)

	D	H	Cut Out
Size 1	40	41	30
Size 2	57	71	50
Size 3	68	87	60

Discreto downlight collection offers options to choose from wattages between 3W to 6W in all standard symmetric beam options and as made available in a discrete single size option within the standard color spectrums.

The complete range is IP20 suitable for indoor applications as offered.

CCT of 5000K and 6000K are also available on request.

Standard protocol for fixed output driver is offered in our article coding. Dimmable driver options are available on request.

## Technical Data

**CREE** **bridgelux** **EPISTAR**

Body	Die Cast Aluminium
LED Type	COB
Colour Deviation	<2 SDCM
Colour Rendering Index	+90
Lumen Maintenance	L90 / B10 50000 hours
Driver	Integral
Dimmability	DALI (on request)
IP Rating	IP 20
Protection Class	Class II

## Certifications



## Available Options



Light Distribution		Watt	Lumen	Colour Temp	Finishes
15 deg	Spot (S)	3	150	2700 K	White
	38 deg	5	350		
24 deg	Medium (M)	6	450	3000 K	Black
				4000 K	White - Black

## AEWIS

We reserve the right for technical and design changes  
For latest product update please refer [www.aewis.com](http://www.aewis.com)

# DISCRETO

recessed luminaires  
round | fixed

Size 1	Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
	DI 111 003 2 S	White	3	150 lm	2700 K	15 deg
	DI 111 003 3 S	White	3	150 lm	3000 K	15 deg
	DI 111 003 4 S	White	3	150 lm	4000 K	15 deg
	DI 121 003 2 S	Black	3	150 lm	2700 K	15 deg
	DI 121 003 3 S	Black	3	150 lm	3000 K	15 deg
	DI 121 003 4 S	Black	3	150 lm	4000 K	15 deg
	DI 131 003 2 S	White - Black	3	150 lm	2700 K	15 deg
	DI 131 003 3 S	White - Black	3	150 lm	3000 K	15 deg
	DI 131 003 4 S	White - Black	3	150 lm	4000 K	15 deg
	DI 111 003 2 M	White	3	150 lm	2700 K	24 deg
	DI 111 003 3 M	White	3	150 lm	3000 K	24 deg
	DI 111 003 4 M	White	3	150 lm	4000 K	24 deg
	DI 121 003 2 M	Black	3	150 lm	2700 K	24 deg
	DI 121 003 3 M	Black	3	150 lm	3000 K	24 deg
	DI 121 003 4 M	Black	3	150 lm	4000 K	24 deg
	DI 131 003 2 M	White - Black	3	150 lm	2700 K	24 deg
	DI 131 003 3 M	White - Black	3	150 lm	3000 K	24 deg
	DI 131 003 4 M	White - Black	3	150 lm	4000 K	24 deg
	DI 111 003 2 F	White	3	150 lm	2700 K	38 deg
	DI 111 003 3 F	White	3	150 lm	3000 K	38 deg
	DI 111 003 4 F	White	3	150 lm	4000 K	38 deg
	DI 121 003 2 F	Black	3	150 lm	2700 K	38 deg
	DI 121 003 3 F	Black	3	150 lm	3000 K	38 deg
	DI 121 003 4 F	Black	3	150 lm	4000 K	38 deg
	DI 131 003 2 F	White - Black	3	150 lm	2700 K	38 deg
	DI 131 003 3 F	White - Black	3	150 lm	3000 K	38 deg
	DI 131 003 4 F	White - Black	3	150 lm	4000 K	38 deg

## Size 2

	DI 112 005 2 S	White	5	350 lm	2700 K	15 deg
	DI 112 005 2 S	White	5	350 lm	2700 K	15 deg
	DI 112 005 2 S	White	5	350 lm	2700 K	15 deg
	DI 112 005 2 S	White	5	350 lm	2700 K	15 deg
	DI 112 005 2 S	White	5	350 lm	2700 K	15 deg
	DI 112 005 2 S	White	5	350 lm	2700 K	15 deg
	DI 112 005 2 S	White	5	350 lm	2700 K	15 deg
	DI 112 005 2 S	White	5	350 lm	2700 K	15 deg

## AEWIS

We reserve the right for technical and design changes  
For latest product update please refer [www.aewis.com](http://www.aewis.com)


# DISCRETO

recessed luminaires  
round | fixed

Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
DI 112 005 2 S	White - Black	5	350 lm	4000 K	15 deg
DI 112 005 2 M	White	5	350 lm	2700 K	24 deg
DI 112 005 3 M	White	5	350 lm	3000 K	24 deg
DI 112 005 4 M	White	5	350 lm	4000 K	24 deg
DI 122 005 2 M	Black	5	350 lm	2700 K	24 deg
DI 122 005 3 M	Black	5	350 lm	3000 K	24 deg
DI 122 005 4 M	Black	5	350 lm	4000 K	24 deg
DI 132 005 2 M	White - Black	5	350 lm	2700 K	24 deg
DI 132 005 3 M	White - Black	5	350 lm	3000 K	24 deg
DI 132 005 4 M	White - Black	5	350 lm	4000 K	24 deg
DI 112 005 2 F	White	5	350 lm	2700 K	38 deg
DI 112 005 3 F	White	5	350 lm	3000 K	38 deg
DI 112 005 4 F	White	5	350 lm	4000 K	38 deg
DI 122 005 2 F	Black	5	350 lm	2700 K	38 deg
DI 122 005 3 F	Black	5	350 lm	3000 K	38 deg
DI 122 005 4 F	Black	5	350 lm	4000 K	38 deg
DI 132 005 2 F	White - Black	5	350 lm	2700 K	38 deg
DI 132 005 3 F	White - Black	5	350 lm	3000 K	38 deg
DI 132 005 4 F	White - Black	5	350 lm	4000 K	38 deg

## Size 3

/// Cut out ///



Dia - 68 mm  
Height - 87 mm  
Cutout - 60 mm

DI 113 006 2 S	White	6	450 lm	2700 K	15 deg
DI 113 006 3 S	White	6	450 lm	3000 K	15 deg
DI 113 006 4 S	White	6	450 lm	4000 K	15 deg
DI 123 006 2 S	Black	6	450 lm	2700 K	15 deg
DI 123 006 3 S	Black	6	450 lm	3000 K	15 deg
DI 123 006 4 S	Black	6	450 lm	4000 K	15 deg
DI 133 006 2 S	White - Black	6	450 lm	2700 K	15 deg
DI 133 006 3 S	White - Black	6	450 lm	3000 K	15 deg
DI 133 006 4 S	White - Black	6	450 lm	4000 K	15 deg
DI 113 006 2 M	White	6	450 lm	2700 K	24 deg
DI 113 006 3 M	White	6	450 lm	3000 K	24 deg
DI 113 006 4 M	White	6	450 lm	4000 K	24 deg
DI 123 006 2 M	Black	6	450 lm	2700 K	24 deg
DI 123 006 3 M	Black	6	450 lm	3000 K	24 deg
DI 123 006 4 M	Black	6	450 lm	4000 K	24 deg
DI 133 006 2 M	White - Black	6	450 lm	2700 K	24 deg

## AEWIS




We reserve the right for technical and design changes  
For latest product update please refer [www.aewis.com](http://www.aewis.com)

# DISCRETO

recessed luminaires  
round | fixed

Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
DI 133 006 3 M	White - Black	6	450 lm	3000 K	24 deg
DI 133 006 4 M	White - Black	6	450 lm	4000 K	24 deg
DI 113 006 2 F	White	6	450 lm	2700 K	38 deg
DI 113 006 3 F	White	6	450 lm	3000 K	38 deg
DI 113 006 4 F	White	6	450 lm	4000 K	38 deg
DI 123 006 2 F	Black	6	450 lm	2700 K	38 deg
DI 123 006 3 F	Black	6	450 lm	3000 K	38 deg
DI 123 006 4 F	Black	6	450 lm	4000 K	38 deg
DI 133 006 2 F	White - Black	6	450 lm	2700 K	38 deg
DI 133 006 3 F	White - Black	6	450 lm	3000 K	38 deg
DI 133 006 4 F	White - Black	6	450 lm	4000 K	38 deg

## Light Distribution Curves

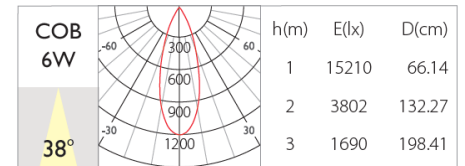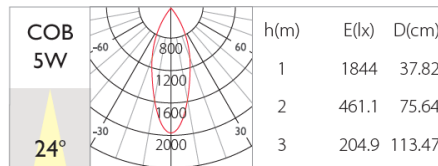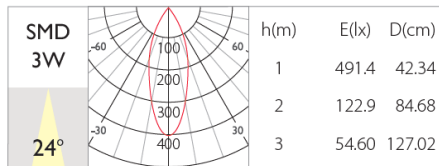

## AEWIS

We reserve the right for technical and design changes  
For latest product update please refer [www.aewis.com](http://www.aewis.com)