


DROITE



SIZES



WATTS




BEAM ANGLES



INGRESS

DROITE

recessed luminaires
round | fixed

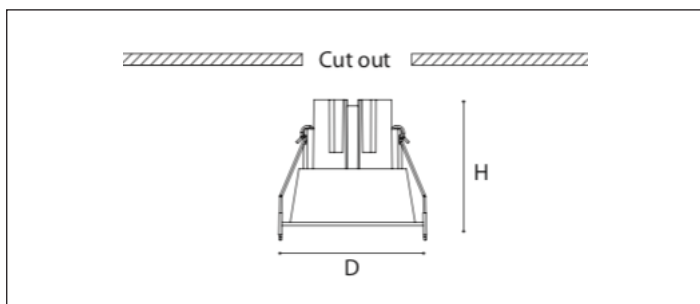

Dimensions (mm)

	D	H	Cut Out
Size 1	75	70	65
Size 2	85	75	75
Size 3	105	85	95

Available Options

Light Distribution		Watt	Lumen	Colour Temp	Finishes
15 deg Spot (S)	38 deg Medium (M)	6	480	2700 K	White
24 deg Medium (M)	60 deg Flood (F)	12	960	3000 K	Black
		18	1440	4000 K	White Black

Droite downlight collection offers options to chose from wattages between 6 W & 18 W in all standard symmetric beam options and as made available in a discrete single size option with in the standard color spectrums.

The complete range is IP20 suitable for indoor applications as offered.

CCT of 5000K and 6000K are also available on request.

Standard protocol for fixed output driver is offered in our article coding. Dimmable driver options are available on request.

Technical Data

CREE **bridgelux** **EPISTAR**

Body	Die Cast Aluminium
LED Type	COB
Colour Deviation	<2 SDCM
Colour Rendering Index	+90
Lumen Maintenance	L90 / B10 50000 hours
Driver	Integral
Dimmability	DALI (on request)
IP Rating	IP 20
Protection Class	Class II

Certifications




AEWIS

We reserve the right for technical and design changes
For latest product update please refer www.aewis.com

DROITE

recessed luminaires
round | fixed

Size 1	Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
 <p>Dia - 75 mm Height - 70 mm Cutout - 65 mm</p>	DR 111 006 2 S	White	6	480 lm	2700 K	15 deg
	DR 111 006 3 S	White	6	480 lm	3000 K	15 deg
	DR 111 006 4 S	White	6	480 lm	4000 K	15 deg
	DR 121 006 2 S	Black	6	480 lm	2700 K	15 deg
	DR 121 006 3 S	Black	6	480 lm	3000 K	15 deg
	DR 121 006 4 S	Black	6	480 lm	4000 K	15 deg
	DR 131 006 2 S	White - Black	6	480 lm	2700 K	15 deg
	DR 131 006 3 S	White - Black	6	480 lm	3000 K	15 deg
	DR 131 006 4 S	White - Black	6	480 lm	4000 K	15 deg
	DR 111 006 2 M	White	6	480 lm	2700 K	24 deg
	DR 111 006 3 M	White	6	480 lm	3000 K	24 deg
	DR 111 006 4 M	White	6	480 lm	4000 K	24 deg
	DR 121 006 2 M	Black	6	480 lm	2700 K	24 deg
	DR 121 006 3 M	Black	6	480 lm	3000 K	24 deg
	DR 121 006 4 M	Black	6	480 lm	4000 K	24 deg
	DR 131 006 2 M	White - Black	6	480 lm	2700 K	24 deg
	DR 131 006 3 M	White - Black	6	480 lm	3000 K	24 deg
	DR 131 006 4 M	White - Black	6	480 lm	4000 K	24 deg
	DR 111 006 2 F	White	6	480 lm	2700 K	60 deg
	DR 111 006 3 F	White	6	480 lm	3000 K	60 deg
	DR 111 006 4 F	White	6	480 lm	4000 K	60 deg
	DR 121 006 2 F	Black	6	480 lm	2700 K	60 deg
	DR 121 006 3 F	Black	6	480 lm	3000 K	60 deg
	DR 121 006 4 F	Black	6	480 lm	4000 K	60 deg
	DR 131 006 2 F	White - Black	6	480 lm	2700 K	60 deg
	DR 131 006 3 F	White - Black	6	480 lm	3000 K	60 deg
	DR 131 006 4 F	White - Black	6	480 lm	4000 K	60 deg

Size 2	Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
 <p>Dia - 85 mm Height - 75 mm Cutout - 75 mm</p>	DR 112 012 2 S	White	12	960 lm	2700 K	15 deg
	DR 112 012 3 S	White	12	960 lm	3000 K	15 deg
	DR 112 012 4 S	White	12	960 lm	4000 K	15 deg
	DR 122 012 2 S	Black	12	960 lm	2700 K	15 deg
	DR 122 012 3 S	Black	12	960 lm	3000 K	15 deg
	DR 122 012 4 S	Black	12	960 lm	4000 K	15 deg
	DR 132 012 2 S	White - Black	12	960 lm	2700 K	15 deg
	DR 132 012 3 S	White - Black	12	960 lm	3000 K	15 deg

AEWIS

We reserve the right for technical and design changes
For latest product update please refer www.aewis.com


DROITE

recessed luminaires
round | fixed

Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
DR 132 012 4 S	White - Black	12	960 lm	4000 K	15 deg
DR 112 012 2 M	White	12	960 lm	2700 K	24 deg
DR 112 012 3 M	White	12	960 lm	3000 K	24 deg
DR 112 012 4 M	White	12	960 lm	4000 K	24 deg
DR 122 012 2 M	Black	12	960 lm	2700 K	24 deg
DR 122 012 3 M	Black	12	960 lm	3000 K	24 deg
DR 122 012 4 M	Black	12	960 lm	4000 K	24 deg
DR 132 012 2 M	White - Black	12	960 lm	2700 K	24 deg
DR 132 012 3 M	White - Black	12	960 lm	3000 K	24 deg
DR 132 012 4 M	White - Black	12	960 lm	4000 K	24 deg
DR 112 012 2 F	White	12	960 lm	2700 K	60 deg
DR 112 012 3 F	White	12	960 lm	3000 K	60 deg
DR 112 012 4 F	White	12	960 lm	4000 K	60 deg
DR 122 012 2 F	Black	12	960 lm	2700 K	60 deg
DR 122 012 3 F	Black	12	960 lm	3000 K	60 deg
DR 122 012 4 F	Black	12	960 lm	4000 K	60 deg
DR 132 012 2 F	White - Black	12	960 lm	2700 K	60 deg
DR 132 012 3 F	White - Black	12	960 lm	3000 K	60 deg
DR 132 012 4 F	White - Black	12	960 lm	4000 K	60 deg

Size 3

/// Cut out ///



Dia - 105 mm
Height - 85 mm
Cutout - 95 mm

DR 113 018 2 S	White	18	1440 lm	2700 K	15 deg
DR 113 018 3 S	White	18	1440 lm	3000 K	15 deg
DR 113 018 4 S	White	18	1440 lm	4000 K	15 deg
DR 123 018 2 S	Black	18	1440 lm	2700 K	15 deg
DR 123 018 3 S	Black	18	1440 lm	3000 K	15 deg
DR 123 018 4 S	Black	18	1440 lm	4000 K	15 deg
DR 133 018 2 S	White - Black	18	1440 lm	2700 K	15 deg
DR 133 018 3 S	White - Black	18	1440 lm	3000 K	15 deg
DR 133 018 4 S	White - Black	18	1440 lm	4000 K	15 deg
DR 113 018 2 M	White	18	1440 lm	2700 K	24 deg
DR 113 018 3 M	White	18	1440 lm	3000 K	24 deg
DR 113 018 4 M	White	18	1440 lm	4000 K	24 deg
DR 123 018 2 M	Black	18	1440 lm	2700 K	24 deg
DR 123 018 3 M	Black	18	1440 lm	3000 K	24 deg
DR 123 018 4 M	Black	18	1440 lm	4000 K	24 deg
DR 133 018 2 M	White - Black	18	1440 lm	2700 K	24 deg

AEWIS




We reserve the right for technical and design changes
For latest product update please refer www.aewis.com

DROITE

recessed luminaires
round | fixed

Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
DR 133 018 3 M	White - Black	18	1440 lm	3000 K	24 deg
DR 133 018 4 M	White - Black	18	1440 lm	4000 K	24 deg
DR 113 018 2 F	White	18	1440 lm	2700 K	60 deg
DR 113 018 3 F	White	18	1440 lm	3000 K	60 deg
DR 113 018 4 F	White	18	1440 lm	4000 K	60 deg
DR 123 018 2 F	Black	18	1440 lm	2700 K	60 deg
DR 123 018 3 F	Black	18	1440 lm	3000 K	60 deg
DR 123 018 4 F	Black	18	1440 lm	4000 K	60 deg
DR 133 018 2 F	White - Black	18	1440 lm	2700 K	60 deg
DR 133 018 3 F	White - Black	18	1440 lm	3000 K	60 deg
DR 133 018 4 F	White - Black	18	1440 lm	4000 K	60 deg

Light Distribution Curves

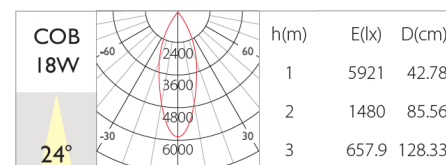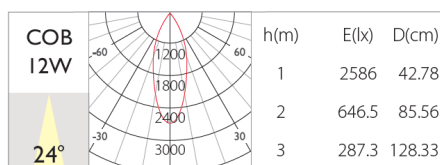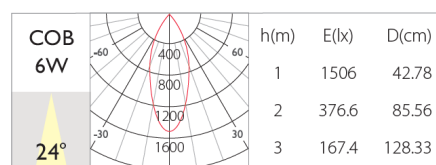

AEWIS

We reserve the right for technical and design changes
For latest product update please refer www.aewis.com