

ESKE



03

SIZES



08 - 30

WATTS



03

BEAM ANGLES




IP 20

INGRESS

ESKE

track light
3 circuit | square

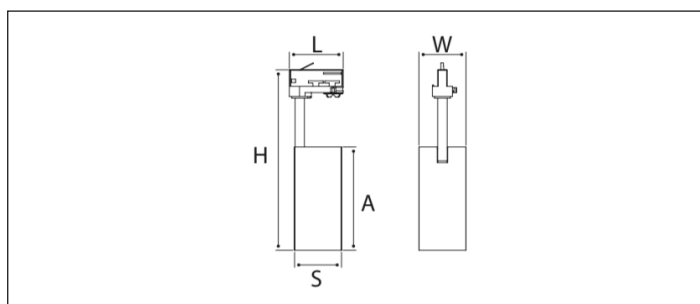

Dimensions (mm)

	L	W	H	D/A
Size 1	86	55	298	55/175
Size 2	86	75	298	75/175
Size 3	103	95	318	95/195

Eske 3-circuit track mounted Spot light collection offers options to chose from wattages ranging between 8W - 30W in all standard symmetric beam options and as made available across 2 varied size options to adopt to site requirements within the standard color spectrums.

The complete range is IP20 suitable for indoor applications as offered.

CCT of 5000K and 5700K are also available on request.

Standard protocol for fixed output driver is offered in our article coding. Dimmable driver options are available on request.

Technical Data

CREE **bridgelux** **EPISTAR**

Body	Die Cast Aluminium
LED Type	COB
Colour Deviation	<2 SDCM
Colour Rendering Index	+90
Lumen Maintenance	L90 / B10 50000 hours
Driver	Integral
Dimmability	DALI (on request)
IP Rating	IP 20
Protection Class	Class II

Certifications



Available Options


Light Distribution		Watt	Lumen	Colour Temp	Finishes
15 deg	Spot (S)	8	680	2700 K	White
	45 deg				
30 deg	Medium (M)	12	1020	3000 K	Black
		15	1275		
		20	1700	4000 K	
		25	2125		
30	2550				

AEWIS

We reserve the right for technical and design changes
For latest product update please refer www.aewis.com

ESKE

track light
3 circuit | square

Size 1	Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
 <p>Length - 86 mm Width - 55 mm Height - 298 mm</p>	ES 111 008 2 S	White	8	680 lm	2700 K	15 deg
	ES 111 008 3 S	White	8	680 lm	3000 K	15 deg
	ES 111 008 4 S	White	8	680 lm	4000 K	15 deg
	ES 121 008 2 S	Black	8	680 lm	2700 K	15 deg
	ES 121 008 3 S	Black	8	680 lm	3000 K	15 deg
	ES 121 008 4 S	Black	8	680 lm	4000 K	15 deg
	ES 111 008 2 M	White	8	680 lm	2700 K	45 deg
	ES 111 008 3 M	White	8	680 lm	3000 K	45 deg
	ES 111 008 4 M	White	8	680 lm	4000 K	45 deg
	ES 121 008 2 M	Black	8	680 lm	2700 K	45 deg
	ES 3 008 121 M	Black	8	680 lm	3000 K	45 deg
	ES 121 008 4 M	Black	8	680 lm	4000 K	45 deg
	ES 111 012 2 S	White	12	1020 lm	2700 K	15 deg
	ES 111 012 3 S	White	12	1020 lm	3000 K	15 deg
	ES 111 012 4 S	White	12	1020 lm	4000 K	15 deg
	ES 121 012 2 S	Black	12	1020 lm	2700 K	15 deg
	ES 121 012 3 S	Black	12	1020 lm	3000 K	15 deg
	ES 121 012 4 S	Black	12	1020 lm	4000 K	15 deg
	ES 111 012 2 M	White	12	1020 lm	2700 K	45 deg
	ES 3 012 111 M	White	12	1020 lm	3000 K	45 deg
	ES 111 012 4 M	White	12	1020 lm	4000 K	45 deg
	ES 121 012 2 M	Black	12	1020 lm	2700 K	45 deg
	ES 121 012 3 M	Black	12	1020 lm	3000 K	45 deg
	ES 121 012 4 M	Black	12	1020 lm	4000 K	45 deg

Size 2	Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
 <p>Length - 86 mm Width - 75 mm Height - 298 mm</p>	ES 112 015 2 S	White	15	1275 lm	2700 K	15 deg
	ES 112 015 3 S	White	15	1275 lm	3000 K	15 deg
	ES 112 015 4 S	White	15	1275 lm	4000 K	15 deg
	ES 122 015 2 S	Black	15	1275 lm	2700 K	15 deg
	ES 122 015 3 S	Black	15	1275 lm	3000 K	15 deg
	ES 122 015 4 S	Black	15	1275 lm	4000 K	15 deg
	ES 112 015 2 M	White	15	1275 lm	2700 K	45 deg
	ES 112 015 3 M	White	15	1275 lm	3000 K	45 deg
	ES 112 015 4 M	White	15	1275 lm	4000 K	45 deg
	ES 122 015 2 M	Black	15	1275 lm	2700 K	45 deg
	ES 122 015 3 M	Black	15	1275 lm	3000 K	45 deg

AEWIS


We reserve the right for technical and design changes
For latest product update please refer www.aewis.com

ESKE

track light
3 circuit | square

Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
ES 122 015 4 M	Black	15	1275 lm	4000 K	45 deg
ES 112 020 2 S	White	20	1700 lm	2700 K	15 deg
ES 112 020 3 S	White	20	1700 lm	3000 K	15 deg
ES 112 020 4 S	White	20	1700 lm	4000 K	15 deg
ES 122 020 2 S	Black	20	1700 lm	2700 K	15 deg
ES 122 020 3 S	Black	20	1700 lm	3000 K	15 deg
ES 122 020 4 S	Black	20	1700 lm	4000 K	15 deg
ES 112 020 2 M	White	20	1700 lm	2700 K	45 deg
ES 112 020 3 M	White	20	1700 lm	3000 K	45 deg
ES 112 020 4 M	White	20	1700 lm	4000 K	45 deg
ES 2 020 122 M	Black	20	1700 lm	2700 K	45 deg
ES 122 020 3 M	Black	20	1700 lm	3000 K	45 deg
ES 122 020 4 M	Black	20	1700 lm	4000 K	45 deg

Size 3



Length - 103 mm
Width - 95 mm
Height - 318 mm

ES 113 025 2 S	White	25	2125 lm	2700 K	15 deg
ES 113 025 3 S	White	25	2125 lm	3000 K	15 deg
ES 113 025 4 S	White	25	2125 lm	4000 K	15 deg
ES 123 025 2 S	Black	25	2125 lm	2700 K	15 deg
ES 123 025 3 S	Black	25	2125 lm	3000 K	15 deg
ES 4 025 123 S	Black	25	2125 lm	4000 K	15 deg
ES 113 025 2 M	White	25	2125 lm	2700 K	45 deg
ES 113 025 3 M	White	25	2125 lm	3000 K	45 deg
ES 113 025 4 M	White	25	2125 lm	4000 K	45 deg
ES 123 025 2 M	Black	25	2125 lm	2700 K	45 deg
ES 123 025 3 M	Black	25	2125 lm	3000 K	45 deg
ES 123 025 4 M	Black	25	2125 lm	4000 K	45 deg
ES 113 030 2 S	White	30	2550 lm	2700 K	15 deg
ES 113 030 3 S	White	30	2550 lm	3000 K	15 deg
ES 113 030 4 S	White	30	2550 lm	4000 K	15 deg
ES 123 030 2 S	Black	30	2550 lm	2700 K	15 deg
ES 123 030 3 S	Black	30	2550 lm	3000 K	15 deg
ES 123 030 4 S	Black	30	2550 lm	4000 K	15 deg
ES 113 030 2 M	White	30	2550 lm	2700 K	45 deg
ES 113 030 3 M	White	30	2550 lm	3000 K	45 deg
ES 113 030 4 M	White	30	2550 lm	4000 K	45 deg
ES 123 030 2 M	Black	30	2550 lm	2700 K	45 deg

AEWIS





We reserve the right for technical and design changes
For latest product update please refer www.aewis.com

ESKE

track light
3 circuit | square

Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
ES 123 030 3 M	Black	30	2550 lm	3000 K	45 deg
ES 123 030 4 M	Black	30	2550 lm	4000 K	45 deg

Light Distribution Curves

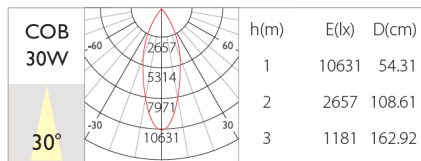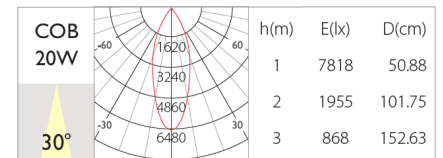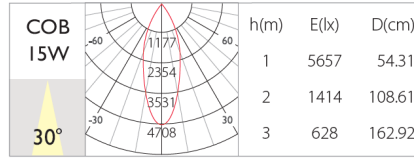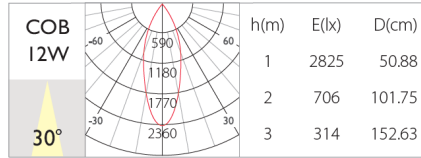

AEWIS

We reserve the right for technical and design changes
For latest product update please refer www.aewis.com