

FLECHE



SIZES



WATTS




BEAM ANGLES



INGRESS

FLECHE

ceiling mounted luminaires
rectangular | fixed

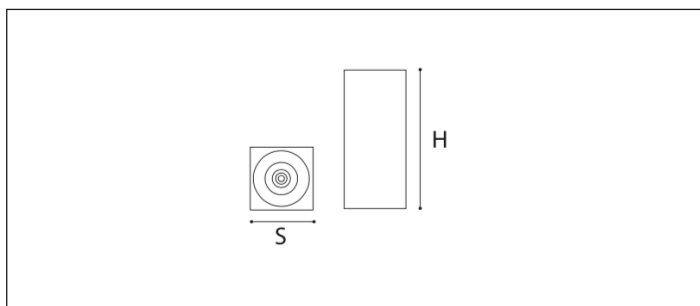

Dimensions (mm)

	L	B	H
Size 1	80	80	103
Size 2	100	100	128

Fleche surface mounted 'square' downlight collection offers options to choose from wattages between 8W & 12W in all standard symmetric beam options and as made available in 2 varied sizes within the standard color spectrums.

The complete range is IP44 suitable for semi outdoor applications as offered.

CCT of 5000K and 6000K are also available on request.

Standard protocol for fixed output driver is offered in our article coding. Dimmable driver options are available on request.

Technical Data

CREE **bridgelux** **EPISTAR**

Body	Die Cast Aluminium
LED Type	COB
Colour Deviation	<2 SDCM
Colour Rendering Index	+90
Lumen Maintenance	L90 / B10 50000 hours
Driver	Integral
Dimmability	DALI (on request)
IP Rating	IP 44
Protection Class	Class II

Certifications



Available Options


Light Distribution		Watt	Lumen	Colour Temp	Finishes
15 deg Spot (S)	60 deg Flood (F)	8	680	2700 K	White
		12	1020	3000 K	Black
24 deg Medium (M)				4000 K	White - Black
38 deg Medium (M)					

AEWIS

We reserve the right for technical and design changes
For latest product update please refer www.aewis.com

FLECHE

ceiling mounted luminaires
rectangular | fixed

Size 1	Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
 <p>Length - 80 mm Width - 80 mm Height - 103 mm</p>	FL 111 008 2 S	White	8	680 lm	2700 K	15 deg
	FL 111 008 3 S	White	8	680 lm	3000 K	15 deg
	FL 111 008 4 S	White	8	680 lm	4000 K	15 deg
	FL 121 008 2 S	Black	8	680 lm	2700 K	15 deg
	FL 121 008 3 S	Black	8	680 lm	3000 K	15 deg
	FL 121 008 4 S	Black	8	680 lm	4000 K	15 deg
	FL 131 008 2 S	White - Black	8	680 lm	2700 K	15 deg
	FL 131 008 3 S	White - Black	8	680 lm	3000 K	15 deg
	FL 131 008 4 S	White - Black	8	680 lm	4000 K	15 deg
	FL 111 008 2 M	White	8	680 lm	2700 K	38 deg
	FL 111 008 3 M	White	8	680 lm	3000 K	38 deg
	FL 111 008 4 M	White	8	680 lm	4000 K	38 deg
	FL 121 008 2 M	Black	8	680 lm	2700 K	38 deg
	FL 121 008 3 M	Black	8	680 lm	3000 K	38 deg
	FL 121 008 4 M	Black	8	680 lm	4000 K	38 deg
	FL 131 008 2 M	White - Black	8	680 lm	2700 K	38 deg
	FL 131 008 3 M	White - Black	8	680 lm	3000 K	38 deg
	FL 131 008 4 M	White - Black	8	680 lm	4000 K	38 deg
	FL 111 008 2 F	White	8	680 lm	2700 K	60 deg
	FL 111 008 3 F	White	8	680 lm	3000 K	60 deg
	FL 111 008 4 F	White	8	680 lm	4000 K	60 deg
	FL 121 008 2 F	Black	8	680 lm	2700 K	60 deg
	FL 121 008 3 F	Black	8	680 lm	3000 K	60 deg
	FL 121 008 4 F	Black	8	680 lm	4000 K	60 deg
	FL 131 008 2 F	White - Black	8	680 lm	2700 K	60 deg
	FL 131 008 3 F	White - Black	8	680 lm	3000 K	60 deg
	FL 131 008 4 F	White - Black	8	680 lm	4000 K	60 deg

Size 2	Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
 <p>Length - 100 mm Width - 100 mm Height - 128 mm</p>	FL 112 012 2 S	White	12	1020 lm	2700 K	15 deg
	FL 112 012 3 S	White	12	1020 lm	3000 K	15 deg
	FL 112 012 4 S	White	12	1020 lm	4000 K	15 deg
	FL 122 012 2 S	Black	12	1020 lm	2700 K	15 deg
	FL 122 012 3 S	Black	12	1020 lm	3000 K	15 deg
	FL 122 012 4 S	Black	12	1020 lm	4000 K	15 deg
	FL 132 012 2 S	White - Black	12	1020 lm	2700 K	15 deg
	FL 132 012 3 S	White - Black	12	1020 lm	3000 K	15 deg

AEWIS





We reserve the right for technical and design changes
For latest product update please refer www.aewis.com

FLECHE

ceiling mounted luminaires
rectangular | fixed

Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
FL 132 012 4 S	White - Black	12	1020 lm	4000 K	15 deg
FL 112 012 2 M	White	12	1020 lm	2700 K	38 deg
FL 112 012 3 M	White	12	1020 lm	3000 K	38 deg
FL 112 012 4 M	White	12	1020 lm	4000 K	38 deg
FL 122 012 2 M	Black	12	1020 lm	2700 K	38 deg
FL 122 012 3 M	Black	12	1020 lm	3000 K	38 deg
FL 122 012 4 M	Black	12	1020 lm	4000 K	38 deg
FL 132 012 2 M	White - Black	12	1020 lm	2700 K	38 deg
FL 132 012 3 M	White - Black	12	1020 lm	3000 K	38 deg
FL 132 012 4 M	White - Black	12	1020 lm	4000 K	38 deg
FL 112 012 2 F	White	12	1020 lm	2700 K	60 deg
FL 112 012 3 F	White	12	1020 lm	3000 K	60 deg
FL 112 012 4 F	White	12	1020 lm	4000 K	60 deg
FL 122 012 2 F	Black	12	1020 lm	2700 K	60 deg
FL 122 012 3 F	Black	12	1020 lm	3000 K	60 deg
FL 122 012 4 F	Black	12	1020 lm	4000 K	60 deg
FL 132 012 2 F	White - Black	12	1020 lm	2700 K	60 deg
FL 132 012 3 F	White - Black	12	1020 lm	3000 K	60 deg
FL 132 012 4 F	White - Black	12	1020 lm	4000 K	60 deg

Light Distribution Curves

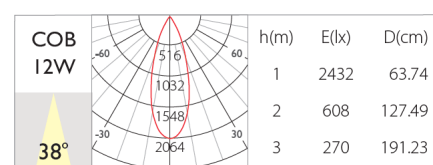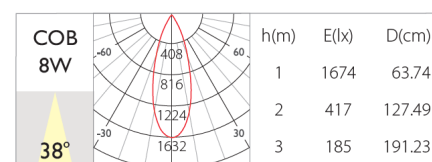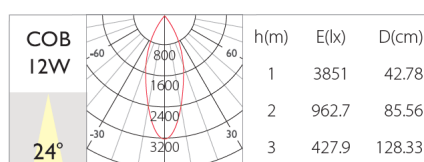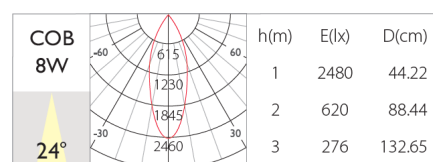

AEWIS

We reserve the right for technical and design changes
For latest product update please refer www.aewis.com