

FUOCO



SIZES



WATTS




BEAM ANGLES



INGRESS

FUOCO

recessed luminaires
round | fixed

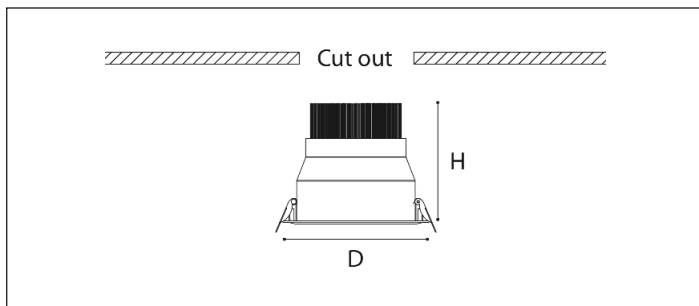

Dimensions (mm)

	D	H	Cut Out
Size 1	100	71	76
Size 2	110	87	89
Size 3	125	107	110
Size 4	150	118	135
Size 5	180	120	160
Size 6	230	136	210

Available Options

Light Distribution		Watt	Lumen	Colour Temp	Finishes
15 deg	Spot (S)	8	680	2700 K	White
	60 deg Flood (F)	12	1020		
24 deg	Medium (M)	15	1275	3000 K	Black
		20	1700		
38 deg	Medium (M)	30	2400	4000 K	White - Black
		40	3400		
		50	4250		

Fuoco downlight collection offers multiple options to choose from wattages ranging between 6W - 50W in all standard symmetric beam options and as made available across 5 varied size options to adapt to site requirements within the standard color spectrums.

The complete range is IP20 suitable for indoor applications as offered.

CCT of 5000K and 6000K are also available on request.

Standard protocol for fixed output driver is offered in our article coding. Dimmable driver options are available on request.

Technical Data

CREE **bridgelux** **EPISTAR**

Body	Die Cast Aluminium
LED Type	COB
Colour Deviation	<2 SDCM
Colour Rendering Index	+90
Lumen Maintenance	L90 / B10 50000 hours
Driver	Integral
Dimmability	DALI (on request)
IP Rating	IP 20
Protection Class	Class II

Certifications




AEWIS

We reserve the right for technical and design changes
For latest product update please refer www.aewis.com

FUOCO

recessed luminaires
round | fixed

Size 1	Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
 <p>Dia - 100 mm Height - 71 mm Cutout - 76 mm</p>	FU 111 008 2 S	White	8	680 lm	2700 K	15 deg
	FU 111 008 3 S	White	8	680 lm	3000 K	15 deg
	FU 111 008 4 S	White	8	680 lm	4000 K	15 deg
	FU 121 008 2 S	Black	8	680 lm	2700 K	15 deg
	FU 121 008 3 S	Black	8	680 lm	3000 K	15 deg
	FU 121 008 4 S	Black	8	680 lm	4000 K	15 deg
	FU 131 008 2 S	White - Black	8	680 lm	2700 K	15 deg
	FU 131 008 3 S	White - Black	8	680 lm	3000 K	15 deg
	FU 131 008 4 S	White - Black	8	680 lm	4000 K	15 deg
	FU 111 008 2 M	White	8	680 lm	2700 K	38 deg
	FU 111 008 3 M	White	8	680 lm	3000 K	38 deg
	FU 111 008 4 M	White	8	680 lm	4000 K	38 deg
	FU 121 008 2 M	Black	8	680 lm	2700 K	38 deg
	FU 121 008 3 M	Black	8	680 lm	3000 K	38 deg
	FU 121 008 4 M	Black	8	680 lm	4000 K	38 deg
	FU 131 008 2 M	White - Black	8	680 lm	2700 K	38 deg
	FU 131 008 3 M	White - Black	8	680 lm	3000 K	38 deg
	FU 131 008 4 M	White - Black	8	680 lm	4000 K	38 deg
	FU 111 008 2 F	White	8	680 lm	2700 K	60 deg
	FU 111 008 3 F	White	8	680 lm	3000 K	60 deg
	FU 111 008 4 F	White	8	680 lm	4000 K	60 deg
	FU 121 008 2 F	Black	8	680 lm	2700 K	60 deg
	FU 121 008 3 F	Black	8	680 lm	3000 K	60 deg
	FU 121 008 4 F	Black	8	680 lm	4000 K	60 deg
	FU 131 008 2 F	White - Black	8	680 lm	2700 K	60 deg
	FU 131 008 3 F	White - Black	8	680 lm	3000 K	60 deg
	FU 131 008 4 F	White - Black	8	680 lm	4000 K	60 deg

Size 2

 <p>Dia - 110 mm Height - 87 mm Cutout - 89 mm</p>	FU 112 012 2 S	White	12	1020 lm	2700 K	15 deg
	FU 112 012 3 S	White	12	1020 lm	3000 K	15 deg
	FU 112 012 4 S	White	12	1020 lm	4000 K	15 deg
	FU 122 012 2 S	Black	12	1020 lm	2700 K	15 deg
	FU 122 012 3 S	Black	12	1020 lm	3000 K	15 deg
	FU 122 012 4 S	Black	12	1020 lm	4000 K	15 deg
	FU 132 012 2 S	White - Black	12	1020 lm	2700 K	15 deg
	FU 132 012 3 S	White - Black	12	1020 lm	3000 K	15 deg

AEWIS

We reserve the right for technical and design changes
For latest product update please refer www.aewis.com


FUOCO

recessed luminaires
round | fixed

Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
FU 132 012 4 S	White - Black	12	1020 lm	4000 K	15 deg
FU 112 012 2 M	White	12	1020 lm	2700 K	38 deg
FU 112 012 3 M	White	12	1020 lm	3000 K	38 deg
FU 112 012 4 M	White	12	1020 lm	4000 K	38 deg
FU 122 012 2 M	Black	12	1020 lm	2700 K	38 deg
FU 122 012 3 M	Black	12	1020 lm	3000 K	38 deg
FU 122 012 4 M	Black	12	1020 lm	4000 K	38 deg
FU 132 012 2 M	White - Black	12	1020 lm	2700 K	38 deg
FU 132 012 3 M	White - Black	12	1020 lm	3000 K	38 deg
FU 132 012 4 M	White - Black	12	1020 lm	4000 K	38 deg
FU 112 012 2 F	White	12	1020 lm	2700 K	60 deg
FU 112 012 3 F	White	12	1020 lm	3000 K	60 deg
FU 112 012 4 F	White	12	1020 lm	4000 K	60 deg
FU 122 012 2 F	Black	12	1020 lm	2700 K	60 deg
FU 122 012 3 F	Black	12	1020 lm	3000 K	60 deg
FU 122 012 4 F	Black	12	1020 lm	4000 K	60 deg
FU 132 012 2 F	White - Black	12	1020 lm	2700 K	60 deg
FU 132 012 3 F	White - Black	12	1020 lm	3000 K	60 deg
FU 132 012 4 F	White - Black	12	1020 lm	4000 K	60 deg

Size 3

/// Cut out ///



FU 113 020 2 S	White	20	1700 lm	2700 K	15 deg
FU 113 020 3 S	White	20	1700 lm	3000 K	15 deg
FU 113 020 4 S	White	20	1700 lm	4000 K	15 deg
FU 123 020 2 S	Black	20	1700 lm	2700 K	15 deg
FU 123 020 3 S	Black	20	1700 lm	3000 K	15 deg
FU 123 020 4 S	Black	20	1700 lm	4000 K	15 deg
FU 133 020 2 S	White - Black	20	1700 lm	2700 K	15 deg
FU 133 020 3 S	White - Black	20	1700 lm	3000 K	15 deg
FU 133 020 4 S	White - Black	20	1700 lm	4000 K	15 deg
FU 113 020 2 M	White	20	1700 lm	2700 K	38 deg
FU 113 020 3 M	White	20	1700 lm	3000 K	38 deg
FU 113 020 4 M	White	20	1700 lm	4000 K	38 deg
FU 123 020 2 M	Black	20	1700 lm	2700 K	38 deg
FU 123 020 3 M	Black	20	1700 lm	3000 K	38 deg
FU 123 020 4 M	Black	20	1700 lm	4000 K	38 deg
FU 133 020 2 M	White - Black	20	1700 lm	2700 K	38 deg

AEWIS

We reserve the right for technical and design changes
For latest product update please refer www.aewis.com


FUOCO

recessed luminaires
round | fixed

Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
FU 133 020 3 M	White - Black	20	1700 lm	3000 K	38 deg
FU 133 020 4 M	White - Black	20	1700 lm	4000 K	38 deg
FU 113 020 2 F	White	20	1700 lm	2700 K	60 deg
FU 113 020 3 F	White	20	1700 lm	3000 K	60 deg
FU 113 020 4 F	White	20	1700 lm	4000 K	60 deg
FU 123 020 2 F	Black	20	1700 lm	2700 K	60 deg
FU 123 020 3 F	Black	20	1700 lm	3000 K	60 deg
FU 123 020 4 F	Black	20	1700 lm	4000 K	60 deg
FU 133 020 2 F	White - Black	20	1700 lm	2700 K	60 deg
FU 133 020 3 F	White - Black	20	1700 lm	3000 K	60 deg
FU 133 020 4 F	White - Black	20	1700 lm	4000 K	60 deg

Size 4

/// Cut out ///



Dia - 150 mm
Height - 118 mm
Cutout - 135 mm

FU 114 030 2 S	White	30	2550 lm	2700 K	15 deg
FU 114 030 3 S	White	30	2550 lm	3000 K	15 deg
FU 114 030 4 S	White	30	2550 lm	4000 K	15 deg
FU 124 030 2 S	Black	30	2550 lm	2700 K	15 deg
FU 124 030 3 S	Black	30	2550 lm	3000 K	15 deg
FU 124 030 4 S	Black	30	2550 lm	4000 K	15 deg
FU 134 030 2 S	White - Black	30	2550 lm	2700 K	15 deg
FU 134 030 3 S	White - Black	30	2550 lm	3000 K	15 deg
FU 134 030 4 S	White - Black	30	2550 lm	4000 K	15 deg
FU 114 030 2 M	White	30	2550 lm	2700 K	38 deg
FU 114 030 3 M	White	30	2550 lm	3000 K	38 deg
FU 114 030 4 M	White	30	2550 lm	4000 K	38 deg
FU 124 030 2 M	Black	30	2550 lm	2700 K	38 deg
FU 124 030 3 M	Black	30	2550 lm	3000 K	38 deg
FU 124 030 4 M	Black	30	2550 lm	4000 K	38 deg
FU 134 030 2 M	White - Black	30	2550 lm	2700 K	38 deg
FU 134 030 3 M	White - Black	30	2550 lm	3000 K	38 deg
FU 134 030 4 M	White - Black	30	2550 lm	4000 K	38 deg
FU 114 030 2 F	White	30	2550 lm	2700 K	60 deg
FU 114 030 3 F	White	30	2550 lm	3000 K	60 deg
FU 114 030 4 F	White	30	2550 lm	4000 K	60 deg
FU 124 030 2 F	Black	30	2550 lm	2700 K	60 deg
FU 124 030 3 F	Black	30	2550 lm	3000 K	60 deg
FU 124 030 4 F	Black	30	2550 lm	4000 K	60 deg

AEWIS


We reserve the right for technical and design changes
For latest product update please refer www.aewis.com

FUOCO

recessed luminaires
round | fixed

	Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
	FU 134 030 2 F	White - Black	30	2550 lm	2700 K	60 deg
	FU 134 030 3 F	White - Black	30	2550 lm	3000 K	60 deg
	FU 134 030 4 F	White - Black	30	2550 lm	4000 K	60 deg

Size 5



	FU 115 040 2 S	White	40	3400 lm	2700 K	15 deg
	FU 115 040 3 S	White	40	3400 lm	3000 K	15 deg
	FU 115 040 4 S	White	40	3400 lm	4000 K	15 deg
	FU 125 040 2 S	Black	40	3400 lm	2700 K	15 deg
	FU 125 040 3 S	Black	40	3400 lm	3000 K	15 deg
	FU 125 040 4 S	Black	40	3400 lm	4000 K	15 deg
	FU 135 040 2 S	White - Black	40	3400 lm	2700 K	15 deg
	FU 135 040 3 S	White - Black	40	3400 lm	3000 K	15 deg
	FU 135 040 4 S	White - Black	40	3400 lm	4000 K	15 deg
	FU 115 040 2 M	White	40	3400 lm	2700 K	38 deg
	FU 115 040 3 M	White	40	3400 lm	3000 K	38 deg
	FU 115 040 4 M	White	40	3400 lm	4000 K	38 deg
	FU 125 040 2 M	Black	40	3400 lm	2700 K	38 deg
	FU 125 040 3 M	Black	40	3400 lm	3000 K	38 deg
	FU 125 040 4 M	Black	40	3400 lm	4000 K	38 deg
	FU 135 040 2 M	White - Black	40	3400 lm	2700 K	38 deg
	FU 135 040 3 M	White - Black	40	3400 lm	3000 K	38 deg
	FU 135 040 4 M	White - Black	40	3400 lm	4000 K	38 deg
	FU 115 040 2 F	White	40	3400 lm	2700 K	60 deg
	FU 115 040 3 F	White	40	3400 lm	3000 K	60 deg
	FU 115 040 4 F	White	40	3400 lm	4000 K	60 deg
	FU 125 040 2 F	Black	40	3400 lm	2700 K	60 deg
	FU 125 040 3 F	Black	40	3400 lm	3000 K	60 deg
	FU 125 040 4 F	Black	40	3400 lm	4000 K	60 deg
	FU 135 040 2 F	White - Black	40	3400 lm	2700 K	60 deg
	FU 135 040 3 F	White - Black	40	3400 lm	3000 K	60 deg
	FU 135 040 4 F	White - Black	40	3400 lm	4000 K	60 deg

Size 6
























	FU 116 050 2 S	White	50	4250 lm	2700 K	15 deg
	FU 116 050 3 S	White	50	4250 lm	3000 K	15 deg
	FU 116 050 4 S	White	50	4250 lm	4000 K	15 deg
	FU 126 050 2 S	Black	50	4250 lm	2700 K	15 deg


AEWIS

We reserve the right for technical and design changes
For latest product update please refer www.aewis.com





FUOCO

recessed luminaires
round | fixed

	Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
	FU 126 050 3 S	Black	50	4250 lm	3000 K	15 deg
	FU 126 050 4 S	Black	50	4250 lm	4000 K	15 deg
	FU 136 050 2 S	White - Black	50	4250 lm	2700 K	15 deg
	FU 136 050 3 S	White - Black	50	4250 lm	3000 K	15 deg
	FU 136 050 4 S	White - Black	50	4250 lm	4000 K	15 deg
	FU 116 050 2 M	White	50	4250 lm	2700 K	38 deg
	FU 116 050 3 M	White	50	4250 lm	3000 K	38 deg
	FU 116 050 4 M	White	50	4250 lm	4000 K	38 deg
	FU 126 050 2 M	Black	50	4250 lm	2700 K	38 deg
	FU 126 050 3 M	Black	50	4250 lm	3000 K	38 deg
	FU 126 050 4 M	Black	50	4250 lm	4000 K	38 deg
	FU 136 050 2 M	White - Black	50	4250 lm	2700 K	38 deg
	FU 136 050 3 M	White - Black	50	4250 lm	3000 K	38 deg
	FU 136 050 4 M	White - Black	50	4250 lm	4000 K	38 deg
	FU 116 050 2 F	White	50	4250 lm	2700 K	60 deg
	FU 116 050 3 F	White	50	4250 lm	3000 K	60 deg
	FU 116 050 4 F	White	50	4250 lm	4000 K	60 deg
	FU 126 050 2 F	Black	50	4250 lm	2700 K	60 deg
	FU 126 050 3 F	Black	50	4250 lm	3000 K	60 deg
	FU 126 050 4 F	Black	50	4250 lm	4000 K	60 deg
	FU 136 050 2 F	White - Black	50	4250 lm	2700 K	60 deg
	FU 136 050 3 F	White - Black	50	4250 lm	3000 K	60 deg
	FU 136 050 4 F	White - Black	50	4250 lm	4000 K	60 deg



Light Distribution Curves

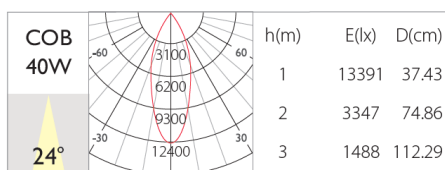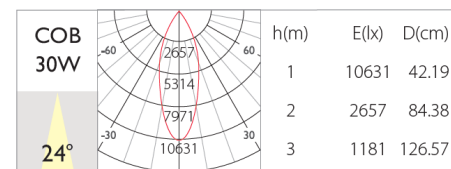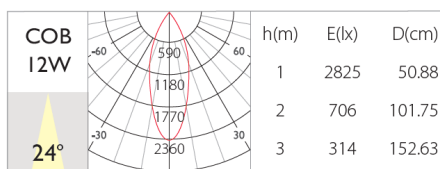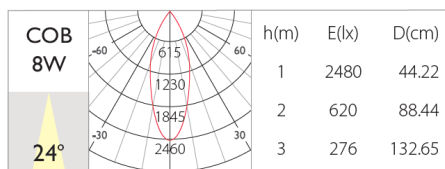

AEWIS

We reserve the right for technical and design changes
For latest product update please refer www.aewis.com