

## NATURA



SIZES



WATTS




BEAM ANGLES



INGRESS

# NATURA

recessed luminaires  
round | fixed

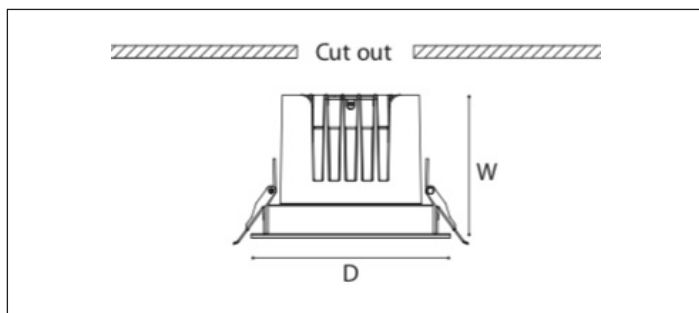

## Dimensions (mm)

	D	H	Cut Out
Size 1	100	75	90
Size 2	110	80	100
Size 3	135	96	125
Size 4	170	112	150
Size 5	215	135	200

## Available Options

Light Distribution		Watt	Lumen	Colour Temp	Finishes
24 deg	Medium (M)	9	720	2700 K	White
	60 deg	12	960		
		15	1200	3000 K	Black
		20	1600		
		30	2500	4000 K	White - Black
		40	3400		
		50	4200		

Natura downlight collection offers multiple options to choose from wattages ranging between 9W - 50W in a Flood beam option and as made available across 5 varied size options to adopt to site requirements within the standard color spectrum.

Special IP44 versions can also be offered on request.

CCT of 5000K and 6000K are also available on request.

Standard protocol for fixed output driver is offered in our article coding. Dimmable driver options are available on request.

## Technical Data

**CREE** **bridgelux** **EPISTAR**

Body	Die Cast Aluminium
LED Type	COB
Colour Deviation	<2 SDCM
Colour Rendering Index	+90
Lumen Maintenance	L90 / B10 50000 hours
Driver	Integral
Dimmability	DALI (on request)
IP Rating	IP 20 & IP 44 (on request)
Protection Class	Class II

## Certifications



## AEWIS

We reserve the right for technical and design changes  
For latest product update please refer [www.aewis.com](http://www.aewis.com)

# NATURA

recessed luminaires  
round | fixed

Size 1	Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
 Cut out	NA 111 009 2 M	White	9	720 lm	2700 K	24 deg
	NA 111 009 3 M	White	9	720 lm	3000 K	24 deg
	NA 111 009 4 M	White	9	720 lm	4000 K	24 deg
	NA 121 009 2 M	Black	9	720 lm	2700 K	24 deg
	NA 121 009 3 M	Black	9	720 lm	3000 K	24 deg
	NA 121 009 4 M	Black	9	720 lm	4000 K	24 deg
	NA 131 009 2 M	White - Black	9	720 lm	2700 K	24 deg
	NA 131 009 3 M	White - Black	9	720 lm	3000 K	24 deg
	NA 131 009 4 M	White - Black	9	720 lm	4000 K	24 deg
	NA 111 009 2 F	White	9	720 lm	2700 K	60 deg
	NA 111 009 3 F	White	9	720 lm	3000 K	60 deg
	NA 111 009 4 F	White	9	720 lm	4000 K	60 deg
	NA 121 009 2 F	Black	9	720 lm	2700 K	60 deg
	NA 121 009 3 F	Black	9	720 lm	3000 K	60 deg
	NA 121 009 4 F	Black	9	720 lm	4000 K	60 deg
	NA 131 009 2 F	White - Black	9	720 lm	2700 K	60 deg
	NA 131 009 3 F	White - Black	9	720 lm	3000 K	60 deg
	NA 131 009 4 F	White - Black	9	720 lm	4000 K	60 deg
	NA 111 012 2 M	White	12	960 lm	2700 K	24 deg
	NA 111 012 3 M	White	12	960 lm	3000 K	24 deg
	NA 111 012 4 M	White	12	960 lm	4000 K	24 deg
	NA 121 012 2 M	Black	12	960 lm	2700 K	24 deg
	NA 121 012 3 M	Black	12	960 lm	3000 K	24 deg
	NA 121 012 4 M	Black	12	960 lm	4000 K	24 deg
	NA 131 012 2 M	White - Black	12	960 lm	2700 K	24 deg
	NA 131 012 3 M	White - Black	12	960 lm	3000 K	24 deg
	NA 131 012 4 M	White - Black	12	960 lm	4000 K	24 deg
	NA 111 012 2 F	White	12	960 lm	2700 K	60 deg
	NA 111 012 3 F	White	12	960 lm	3000 K	60 deg
	NA 111 012 4 F	White	12	960 lm	4000 K	60 deg
	NA 121 012 2 F	Black	12	960 lm	2700 K	60 deg
	NA 121 012 3 F	Black	12	960 lm	3000 K	60 deg
	NA 121 012 4 F	Black	12	960 lm	4000 K	60 deg
	NA 131 012 2 F	White - Black	12	960 lm	2700 K	60 deg
	NA 131 012 3 F	White - Black	12	960 lm	3000 K	60 deg
	NA 131 012 4 F	White - Black	12	960 lm	4000 K	60 deg


Dia - 100 mm  
Height - 75 mm  
Cutout - 90 mm

## AEWIS

We reserve the right for technical and design changes  
For latest product update please refer [www.aewis.com](http://www.aewis.com)

# NATURA

recessed luminaires  
round | fixed



Size 2	Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
 <p>Cut out</p> <p>Dia - 110 mm Height - 80 mm Cutout - 100 mm</p>	NA 112 015 2 M	White	15	1200 lm	2700 K	24 deg
	NA 112 015 3 M	White	15	1200 lm	3000 K	24 deg
	NA 112 015 4 M	White	15	1200 lm	4000 K	24 deg
	NA 122 015 2 M	Black	15	1200 lm	2700 K	24 deg
	NA 122 015 3 M	Black	15	1200 lm	3000 K	24 deg
	NA 122 015 4 M	Black	15	1200 lm	4000 K	24 deg
	NA 132 015 2 M	White - Black	15	1200 lm	2700 K	24 deg
	NA 132 015 3 M	White - Black	15	1200 lm	3000 K	24 deg
	NA 132 015 4 M	White - Black	15	1200 lm	4000 K	24 deg
	NA 112 015 2 F	White	15	1200 lm	2700 K	60 deg
	NA 112 015 3 F	White	15	1200 lm	3000 K	60 deg
	NA 112 015 4 F	White	15	1200 lm	4000 K	60 deg
	NA 122 015 2 F	Black	15	1200 lm	2700 K	60 deg
	NA 122 015 3 F	Black	15	1200 lm	3000 K	60 deg
	NA 122 015 4 F	Black	15	1200 lm	4000 K	60 deg
	NA 132 015 2 F	White - Black	15	1200 lm	2700 K	60 deg
	NA 132 015 3 F	White - Black	15	1200 lm	3000 K	60 deg
	NA 132 015 4 F	White - Black	15	1200 lm	4000 K	60 deg
	NA 112 020 2 M	White	20	1600 lm	2700 K	24 deg
	NA 112 020 3 M	White	20	1600 lm	3000 K	24 deg
	NA 112 020 4 M	White	20	1600 lm	4000 K	24 deg
	NA 122 020 2 M	Black	20	1600 lm	2700 K	24 deg
	NA 122 020 3 M	Black	20	1600 lm	3000 K	24 deg
	NA 122 020 4 M	Black	20	1600 lm	4000 K	24 deg
	NA 132 020 2 M	White - Black	20	1600 lm	2700 K	24 deg
	NA 132 020 3 M	White - Black	20	1600 lm	3000 K	24 deg
	NA 132 020 4 M	White - Black	20	1600 lm	4000 K	24 deg
	NA 112 020 2 F	White	20	1600 lm	2700 K	60 deg
	NA 112 020 3 F	White	20	1600 lm	3000 K	60 deg
	NA 112 020 4 F	White	20	1600 lm	4000 K	60 deg
	NA 122 020 2 F	Black	20	1600 lm	2700 K	60 deg
	NA 122 020 3 F	Black	20	1600 lm	3000 K	60 deg
NA 122 020 4 F	Black	20	1600 lm	4000 K	60 deg	
NA 132 020 2 F	White - Black	20	1600 lm	2700 K	60 deg	
NA 132 020 3 F	White - Black	20	1600 lm	3000 K	60 deg	
NA 132 020 4 F	White - Black	20	1600 lm	4000 K	60 deg	

## AEWIS

We reserve the right for technical and design changes  
For latest product update please refer [www.aewis.com](http://www.aewis.com)

# NATURA

recessed luminaires  
round | fixed


Size 3	Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle	
 <p>Dia - 135 mm Height - 96 mm Cutout - 125 mm</p>	NA 113 030 2 M	White	30	2500 lm	2700 K	24 deg	
	NA 113 030 3 M	White	30	2500 lm	3000 K	24 deg	
	NA 113 030 4 M	White	30	2500 lm	4000 K	24 deg	
	NA 123 030 2 M	Black	30	2500 lm	2700 K	24 deg	
	NA 123 030 3 M	Black	30	2500 lm	3000 K	24 deg	
	NA 123 030 4 M	Black	30	2500 lm	4000 K	24 deg	
	NA 133 030 2 M	White - Black	30	2500 lm	2700 K	24 deg	
	NA 133 030 3 M	White - Black	30	2500 lm	3000 K	24 deg	
	NA 133 030 4 M	White - Black	30	2500 lm	4000 K	24 deg	
	NA 113 030 2 F	White	30	2500 lm	2700 K	60 deg	
	NA 113 030 3 F	White	30	2500 lm	3000 K	60 deg	
	NA 113 030 4 F	White	30	2500 lm	4000 K	60 deg	
	NA 123 030 2 F	Black	30	2500 lm	2700 K	60 deg	
	NA 123 030 3 F	Black	30	2500 lm	3000 K	60 deg	
	NA 123 030 4 F	Black	30	2500 lm	4000 K	60 deg	
	NA 133 030 2 F	White - Black	30	2500 lm	2700 K	60 deg	
	NA 133 030 3 F	White - Black	30	2500 lm	3000 K	60 deg	
	NA 133 030 4 F	White - Black	30	2500 lm	4000 K	60 deg	
	 <p>Dia - 170 mm Height - 112 mm Cutout - 150 mm</p>	NA 114 040 2 M	White	40	3400 lm	2700 K	24 deg
		NA 114 040 3 M	White	40	3400 lm	3000 K	24 deg
NA 114 040 4 M		White	40	3400 lm	4000 K	24 deg	
NA 124 040 2 M		Black	40	3400 lm	2700 K	24 deg	
NA 124 040 3 M		Black	40	3400 lm	3000 K	24 deg	
NA 124 040 4 M		Black	40	3400 lm	4000 K	24 deg	
NA 134 040 2 M		White - Black	40	3400 lm	2700 K	24 deg	
NA 134 040 3 M		White - Black	40	3400 lm	3000 K	24 deg	
NA 134 040 4 M		White - Black	40	3400 lm	4000 K	24 deg	
NA 114 040 2 F		White	40	3400 lm	2700 K	60 deg	
NA 114 040 3 F		White	40	3400 lm	3000 K	60 deg	
NA 114 040 4 F		White	40	3400 lm	4000 K	60 deg	
NA 124 040 2 F		Black	40	3400 lm	2700 K	60 deg	
NA 124 040 3 F		Black	40	3400 lm	3000 K	60 deg	
NA 124 040 4 F		Black	40	3400 lm	4000 K	60 deg	
NA 134 040 2 F		White - Black	40	3400 lm	2700 K	60 deg	
NA 134 040 3 F		White - Black	40	3400 lm	3000 K	60 deg	

## AEWIS





We reserve the right for technical and design changes  
For latest product update please refer [www.aewis.com](http://www.aewis.com)

# NATURA

recessed luminaires  
round | fixed

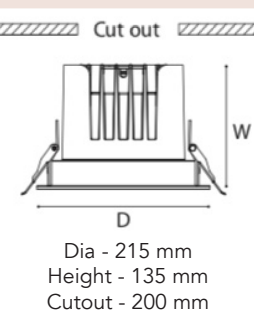Size 5	Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
 <p>Dia - 215 mm Height - 135 mm Cutout - 200 mm</p>	NA 134 040 4 F	White - Black	40	3400 lm	4000 K	60 deg
	NA 115 050 2 M	White	50	4200 lm	2700 K	24 deg
	NA 115 050 3 M	White	50	4200 lm	3000 K	24 deg
	NA 115 050 4 M	White	50	4200 lm	4000 K	24 deg
	NA 125 050 2 M	Black	50	4200 lm	2700 K	24 deg
	NA 125 050 3 M	Black	50	4200 lm	3000 K	24 deg
	NA 125 050 4 M	Black	50	4200 lm	4000 K	24 deg
	NA 135 050 2 M	White - Black	50	4200 lm	2700 K	24 deg
	NA 135 050 3 M	White - Black	50	4200 lm	3000 K	24 deg
	NA 135 050 4 M	White - Black	50	4200 lm	4000 K	24 deg
	NA 115 050 2 F	White	50	4200 lm	2700 K	60 deg
	NA 115 050 3 F	White	50	4200 lm	3000 K	60 deg
	NA 115 050 4 F	White	50	4200 lm	4000 K	60 deg
	NA 125 050 2 F	Black	50	4200 lm	2700 K	60 deg
	NA 125 050 3 F	Black	50	4200 lm	3000 K	60 deg
	NA 125 050 4 F	Black	50	4200 lm	4000 K	60 deg
	NA 135 050 2 F	White - Black	50	4200 lm	2700 K	60 deg
	NA 135 050 3 F	White - Black	50	4200 lm	3000 K	60 deg
	NA 135 050 4 F	White - Black	50	4200 lm	4000 K	60 deg

## Light Distribution Curves

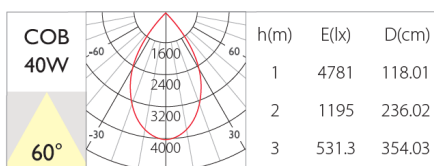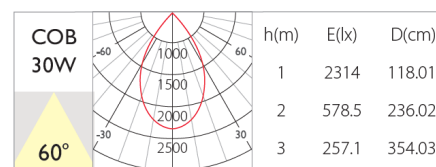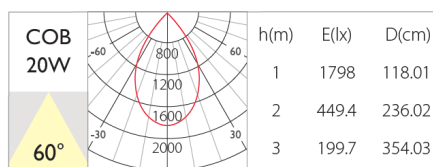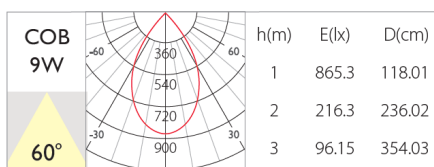

## AEWIS

We reserve the right for technical and design changes  
For latest product update please refer [www.aewis.com](http://www.aewis.com)