


ARCU Recessed Spotlight

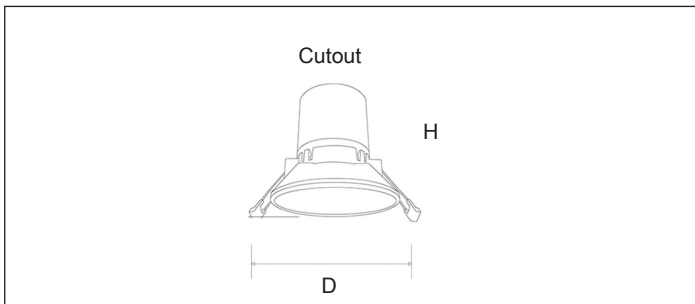

Recessed Spotlight

Wattages 7W - 30W all standard beam options and within the standard color, spectrums

The complete range is IP20 suitable for indoor applications as offered.

CCT of 3000K, 4000K and 6000K are also available on request.

Standard protocol for fixed output driver is offered in our article coding. Dimmable driver options are available on request.

Technical Data

CREE **bridgelux** **EPISTAR**

Material/Finish	Aluminium / White
LED Type	COB
Colour Deviation	<3 SDCM
Colour Rendering Index	+80, +90
Lumen Maintenance	L90 / B10 50000 hours
Driver	Integral
Dimmability	DALI (on request)
IP Rating	IP 20
Protection Class	Class II

Product Details

Code	Wattage	Lumen	D	H	Cutout
ARU010	4W	520LM	70MM	65MM	60MM
ARU015	7W	910LM	75MM	70MM	65MM
ARU020	12W	1560LM	83MM	75MM	76MM
ARU030	18W	2340LM	95MM	85MM	85MM
ARU036	30W	3900LM	128MM	115MM	115MM

Certifications



Available Options




Light Distribution

15 deg	Spot (S)	60 deg	Flood (F)
24 deg	Medium (M)		
38 deg	Medium (M)		

Colour Temp

	3000 K
	4000 K
	6000 K

Finishes

	White
	Black
	White - Black