


CIRCUMDO

Recessed Downlight

Round

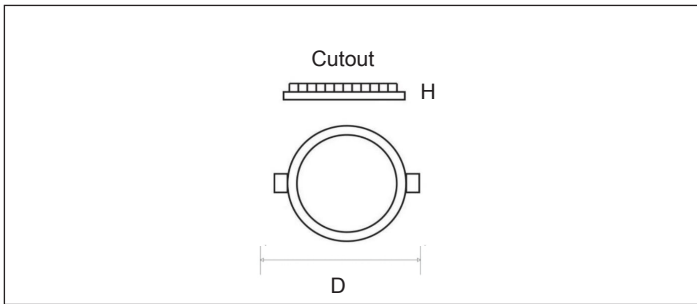

Recessed Downlight Round

wattages 8W - 24W all standard beam options and within the standard color, spectrums

The complete range is IP20 suitable for indoor applications as offered.

CCT of 3000K,4000K and 6000K are also available on request.

Standard protocol for fixed output driver is offered in our article coding. Dimmable driver options are available on request.

Technical Data

CREE **bridgelux** **EPISTAR**

Material/Finish	Aluminium / White
LED Type	COB
Colour Deviation	<3 SDCM
Colour Rendering Index	+80, +90
Lumen Maintenance	L90 / B10 50000 hours
Driver	Integral
Dimmability	DALI (on request)
IP Rating	IP 20
Protection Class	Class II

Product Details

Code	Wattage	Lumen	D	H	Cutout
CIR008	8W	1040LM	120MM	35MM	100MM
CIR012	12W	1560LM	145MM	35MM	125MM
CIR018	18W	2340LM	170MM	35MM	150MM
CIR024	24W	3120LM	195MM	35MM	175MM

Certifications




Available Options




Light Distribution

15 deg	Spot (S)	60 deg	Flood (F)
24 deg	Medium (M)		
38 deg	Medium (M)		

Colour Temp

	3000 K
	4000 K
	6000 K

Finishes

	White
	Black
	White - Black