
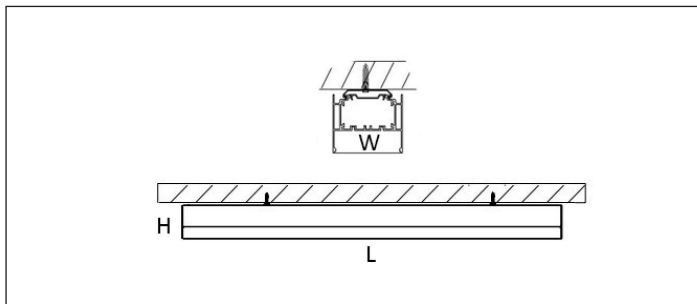


HAENG

Suspended / Surface mounted linear light

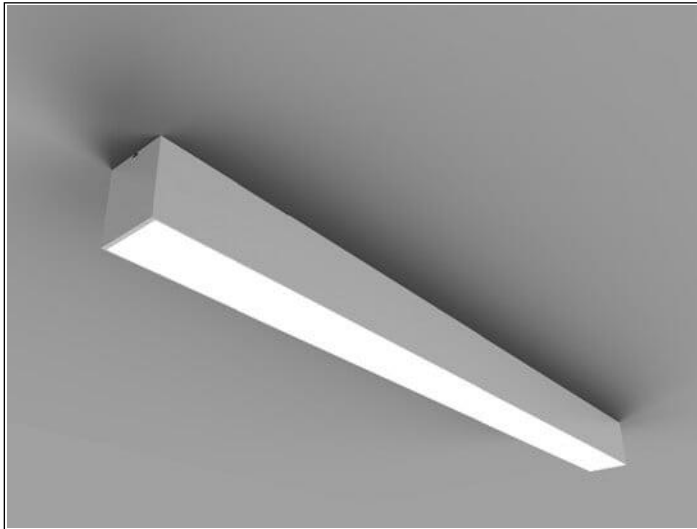

Product Details

Code	Wattage	Lumen	L	W	H
HAE030	30W	3000LM	1180MM	50MM	80MM
HAE040	40W	4000LM	1180MM	50MM	80MM
HAE050	50W	5000LM	1180MM	50MM	80MM

Available Options

Light Distribution

15 deg	Spot (S)	60 deg	Flood (F)
24 deg	Medium (M)		
38 deg	Medium (M)		

Suspended / Surface mounted linear light

Wattages 30W - 50W all standard beam options and within the standard color, spectrums.

The complete range is IP20 suitable for indoor applications as offered.

CCT of 3000K, 4000K and 6000K are also available on request.

Standard protocol for fixed output driver is offered in our article coding. Dimmable driver options are available on request.

Technical Data




CREE **bridgelux** **EPISTAR**

Material/Finish	Aluminium / White
LED Type	COB
Colour Deviation	<3 SDCM
Colour Rendering Index	+80, +90
Lumen Maintenance	L90 / B10 50000 hours
Driver	Integral
Dimmability	DALI (on request)
IP Rating	IP 20
Protection Class	Class II




Certifications



Colour Temp

	3000 K
	4000 K
	6000 K

Finishes

	White
	Black
	White - Black